

Conveyor system XH

Contents

System information	223
Conveyor modules	224
Chains XH	225
Chain accessories XH	226
Beams XH	226
Beam accessories XH	227
Slide rails XH	228
Slide rails XH, hardened steel	229
Drive and idler units – introduction	230
End drive units XH	231
End drive units XH, direct drive with slip clutch	231
End drive units XH Type H, direct drive, no slip clutch	232
Double drive units XH	232
Intermediate drive units XH	233

Catenary drive units XH	233
Bend drive unit XH	234
Idler units XH	234
Bridges	235
Wheel bends XH	236
Wheel cover for Wheel bend	237
Plain bends XH	237
Support rail for plain bends XH	238
Vertical bends XH	239
Angle plates XH	240
Front piece XH	241
Drip trays XH	242
Drip catchers XH	243
Drip pans XH	243

System information



Chain width 103 mm



Features

Suitable for larger items, especially if point of balance is somewhat offcenter. Higher capacity than XS and X65.

Examples of application areas


Large ball bearings, electric motors, steering arm components, secondary packages, cartons.

Technical characteristics

Drive unit capacity	1250 N
Chain tension limit	1250 N
Beam width	105 mm
Chain width	103 mm
Chain pitch	35,5 mm
Item width	25–300 mm
Maximum item weight	
Horizontal transport	20 kg
Vertical transport	15 kg
Maximum weight on conveyor	150–300 kg
Maximum conveyor length	30 m
Maximum permitted load per link 2,0 kg	

Conveyor modules


Straight conveyor



Conveyor module – straight * **5990226**

**Use online configurator when ordering*


One bend conveyor

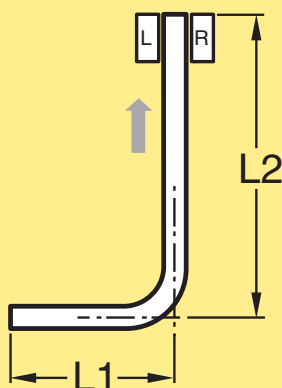

Conveyor module – one bend * **5990230**

**Use online configurator when ordering*

Two bend conveyor

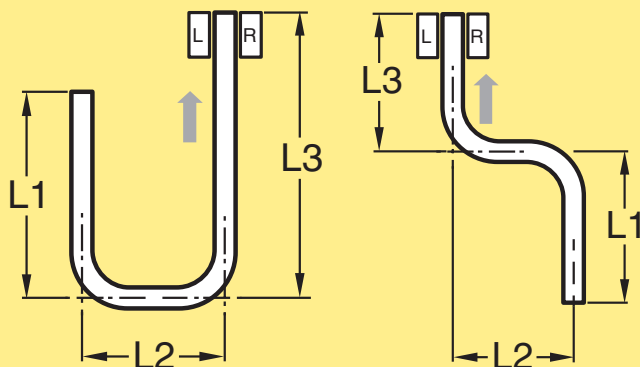


Conveyor module – two bends * **5990237**

**Use online configurator when ordering*

Support modules – single and multi-lane

	5995387	Single diecast
	5995388	Single end adjustable
	5995389	Single end guide roller
	5995390	Single foot plate
	5995391	Single two/three-point
	5995393	Multi single 2 lane
	5995394	Multi single 3 lane
	5995395	Multi single 4 lane
	5995396	Multi double 2 lane
	5995397	Multi double 3 lane
	5995398	Multi double 4 lane

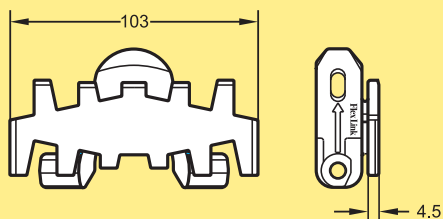Plain chain

Plain chain
Length 5 m

XHTP 5
5056312

Plain link kit *


Plain chain (Ultra low wear)
Length 5 m

XHTP 5 C

Plain link (Ultra low wear)

n.a.

**Note. Link kit contains 10 links, 10 pivot, 10 steel pins.*

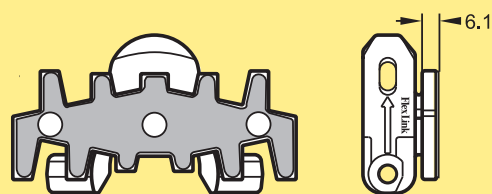Steel top chain


Steel top chain
Length 5 m

XHTP 5 TF

Steel top link kit *

5056594

Note. Link kit contains 10 links, 10 pivot, 10 steel pins.

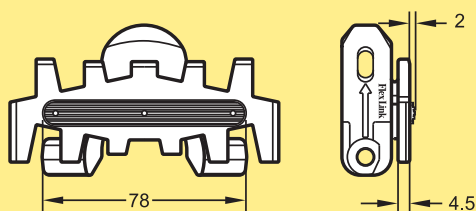Friction top chain

Friction top chain
Length 5 m

XHTP 5 FP

Use the online configurator to specify and order.


Friction top chain
Length 5 m

XHTP 5 F

Friction top link kit *

5056593

**Note. Link kit contains 10 links, 10 pivot, 10 steel pins.*

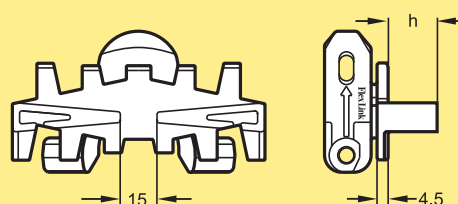Cleated chain, Type A

Cleated chain, Type A cleats*

Length 5 m

h=15 mm

h=20 mm

h=30 mm

h=40 mm

XHTF 5x15 A

XHTF 5x20 A

XHTF 5x30 A

XHTF 5x40 A

**Use the online configurator to specify and order.*

Cleated link kit **

h=15 mm

h=20 mm

h=30 mm

h=40 mm


5056595

5056596

5056597

5056598

***Note. Link kit contains 10 links, 10 pivot, 10 steel pins.*

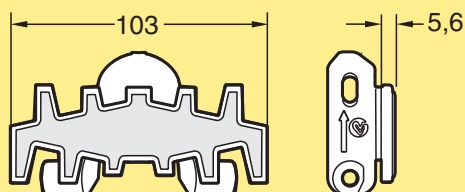Flat top friction chain


Flat top friction chain
Length 5 m

XHTP 5 FA

Flat top friction link kit *

5058544

**Note. Link kit contains 10 links, 10 pivot, 10 steel pins.*

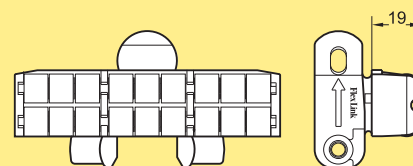Roller top chain

Roller top chain
Length 5 m

XHTR 5

Roller top link kit *) **)


5056603

**Note. This link cannot be combined with plain links.*

***Note. Link kit contains 10 links, 10 pivot, 10 steel pins.*

Chains XH (continued)

Chain with roller cleats

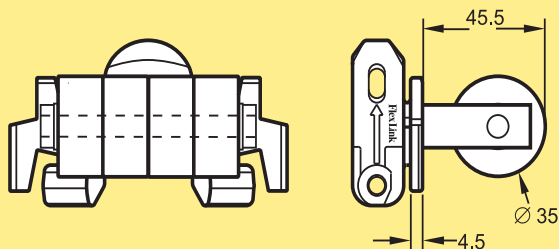

Chain with roller cleats
Length 5 m

XHTF 5x46 R

Use the online configurator to specify and order.

Link kit with roller cleats*

5056604

Note. This type of chain requires minimum one plain link between every cleated link.

*Note. 1 link XHTL 103x46 R with pivot and steel pin.

Other chains

See the *Chain guide* for a selection of other chains.

Chain installation

See Appendix C, page 527, for installation instructions

Chain accessories XH


Plastic pivot



Plastic pivots, kit XH (25 pcs)

5056588


Steel pin



Steel pin, kit (25 pcs) XH

5111502

Pin insertion tool for chain

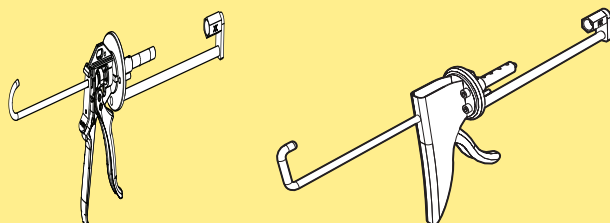

Pin insertion tool
XH

X85-X180/X300-XH, PRO version*


XHMJ 6

XBMJ 6 P

This tool is recommended for frequent users

Beams XH

Conveyor beam

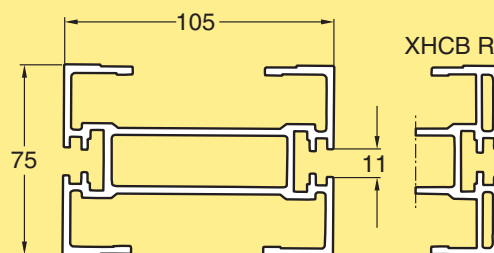

Beam

Length 3000 +10/-0 mm

XHCB 3

Length to order (30- 3000 mm)

XHCB L

Beam, reinforced


Length 3000 +10/-0 mm

XHCB 3 R

Length to order (30- 3000 mm)

XHCB L R


Beam section for chain installation

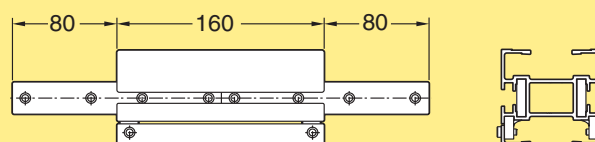

Beam section for chain installation
Including connection strips and
screws

XHCC 160 A

Profile for split conveyor beam



Profile for split conveyor beam


Length 3000 +10/-0 mm

XHCB 3 H

Length to order (30- 3000 mm)

XHCB L H

Beam clip assembly




Beam clip assembly

XHCE 69x30

Including M8 screw and locking nut. Use minimum 5 clips per meter. Place clips 100 mm from each end.

Connecting strip with set screws

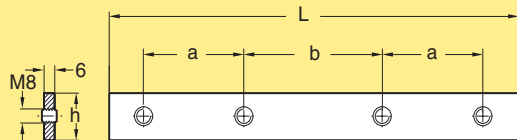

Connecting strip with set screws

$h=25$, $a=30$, $b=50$, $L=130$


$h=25$, $a=44$, $b=44$, $L=160$

XLCJ 6×130

XLCJ 6×160

Note. Contains 10 pcs.

Cover strip for T-slot, PVC

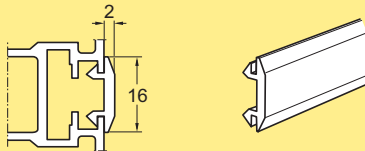


Cover strip for T-slot, PVC

Length 25 m

XLAB 25

For XS-XH

Beam spacer

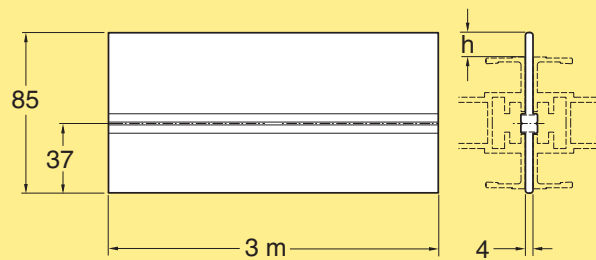

XS	X65	X85/XH	XK
$h=16,0$ mm	$h=15,9$ mm	$h=10,5$ mm	$h=0,5$ mm

Beam spacer


Aluminium, anodized

Length 3 m

XLCD 3

For connection of two conveyor beams side to side. Use M8 screw and slot nut. Two holes must be drilled, one through the spacer (9 mm) and one through the beam, to allow insertion of the screw. The diameter of the second hole depends on the size of the screw head.

Articulated beam section

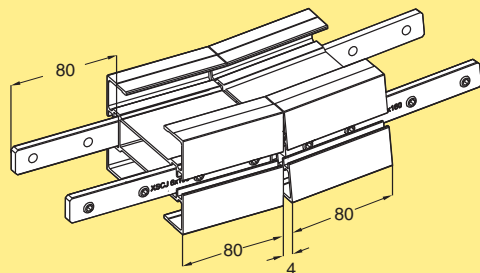


Articulated beam section vertical

XHCH 5 V

Slide rails XH

Plastic slide rails for beams



Slide rail

Length 25 m

HDPE ($\mu=0,1-0,25$) (Black)

PA-PE ($\mu=0,1-0,25$) (Grey)

PVDF ($\mu=0,15-0,35$) (Natural white)

PE-UHMW ($\mu=0,1-0,25$) (White)

PE-UHMW conductive (Black)

XLCR 25

XLCR 25 H

XLCR 25 P

XLCR 25 U

XLCR 25 E

See Appendix A, page 513 for selection guidelines and assembly instructions.

Steel slide rail for beams

XLCR 3 TA




Slide rail ($\mu=0,15-0,35$)

Length 3 m

Acid resistant stainless steel

XLCR 3 TA


Mounting tool for slide rail



Mounting tool for slide rail XH

XHMR 200

Aluminium rivets




Aluminium rivets 4 mm for X65-X85-XH conveyors

XLAH 4x6

Extra slide rail in plain bends must be anchored using plastic screws due to lack of space for the rivet crimping tool.

Note. Contains 250 pcs. 250.

Plastic screws for slide rail




Plastic screws 5 mm for XS-X65-X85-XH-X180/X300 beams

XLAG 5

See mounting instruction "Anchoring slide rail using plastic screws" on page 522

Note. Contains 50 pcs.

Drill fixture for slide rail

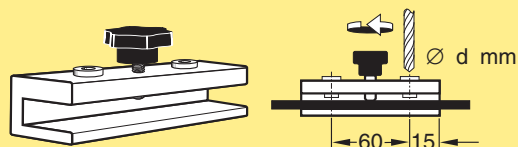

Drill fixture for X65-X85-XH-XK-X180/X300 slide rail

d=4,2 mm

3920500

Rivet crimping pliers




Rivet crimping pliers for X65-X85-XH-XK-X180/X300

For 4 mm rivets

5051395

Rivet crimping clamp




Rivet crimping clamp for X65-X85-XH-XK-X180/X300

For 4 mm rivets

(Allen key not included)

3923005

Cover strip

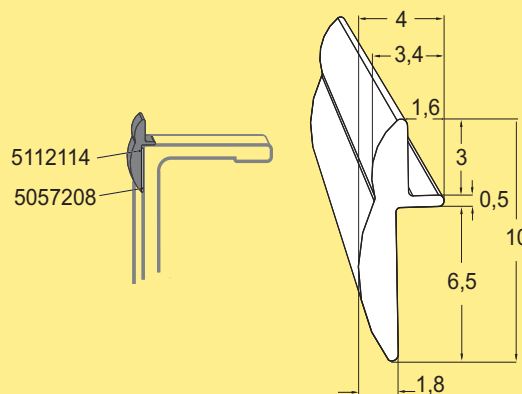

Cover strip


Length: 3 m

Material: Plastic PA 12

5112114

Cover the opening on the side between the chain and beam. Primarily for straight sections and the outer curves, but can also be mounted on inner curves. Apply using a double-sided tape, see mounting instruction 5497EN in Technical library.

Steel slide rail, straight

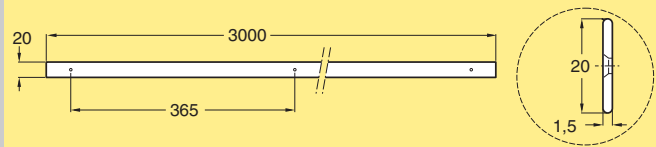


Slide rail, hardened steel
Length 3 m

XLCR 3 TH

Delivered with 9 predrilled holes

Steel slide rail for bends

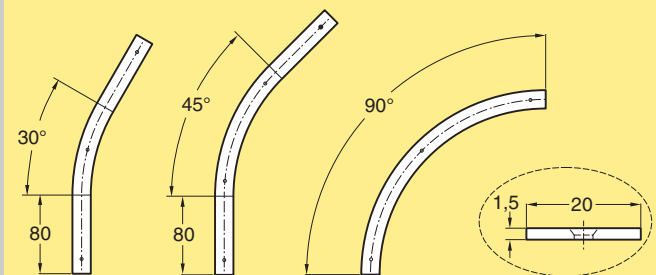

Slide rail for bends, hardened steel

Slide rail for bend, XH 30°

Slide rail for bend, XH 45°

Slide rail for bend, XH 90° & 180°


XHCR W30 TH

XHCR W45 TH

XHCR W90 TH

180°: Use 2 pieces of steel slide rail 90°

Brass rivets



Brass rivets (100 pcs)

5056167

Rivets for anchoring the slide rails

Cleaner 3M



Cleaner (100 sachets)

5057207

Use cleaner on beam and slide rail before attaching glue tape.

Glue tape 3M



Glue tape (for X65, X85, XH)
Length 30 m

5057208



Drive and idler units – introduction

Drive unit types


The XH system includes several configurations are available, including direct driven units with or without slip clutch. Heavy duty drives with suspended motor and transmission chain can also be ordered.

Available motors include variable speed types (**V**) as well as fixed speed motors (**F**).


End drive units

Size	Direct drive, no slip clutch	Direct drive, slip clutch	Suspended motor, transmission chain, slip clutch
			
Heavy	F, V	F, V	F
Heavy, guided	F, V	F, V	–


Intermediate drive units

Size	Suspended motor, transmission chain, slip clutch
	
Heavy	F


Catenary drive units

Size	Suspended motor, transmission chain, slip clutch
	
Heavy	F

Wheel bend drive units

Size	Suspended motor, transmission chain, slip clutch
	
Heavy	F

Double drive units

Size	Suspended motor, transmission chain, slip clutch
	
Heavy	F

Motor specifications

Motors are available for 230/400 V, 50 Hz and 230/460 V, 60 Hz. Variable speed motors are SEW Movimot, 380–500 V. Note that variable speed motors include a control box that adds 120 mm to the width of the motor.

IP55 available with standard oil.

IP65 available with food grade oil.

Ordering information


Drive units with motors must be specified using the web-based configurator. The configurator provides detailed information and step-by-step guidance in the specification process. A product code string is generated, containing the specification details. See next page for examples of code strings.

Drive units *without* motors can be ordered using the designations in the catalogue.

Dimension

Note that dimensions relating to drive unit motors depend on the motor specified during the configuration.


End drive unit, suspended, slip clutch

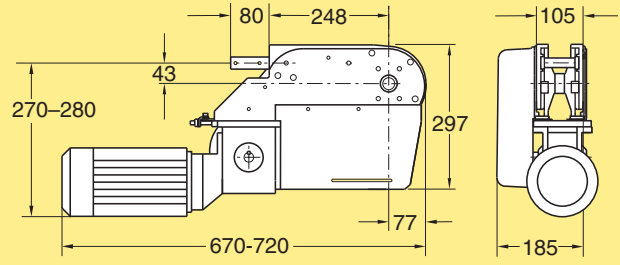

End drive unit
Speed up to 60 m/min
Transmission on left side
Fixed speed*
Without motor (ISO) **XHEB**
Without motor (ANSI) **XHEB 0 HL**
XHEB 0 HLA

Maximum traction force: 1250 N. See page 22.
*Use online configurator when ordering.
Effective track length: 0,80 m

End drive unit, suspended, slip clutch

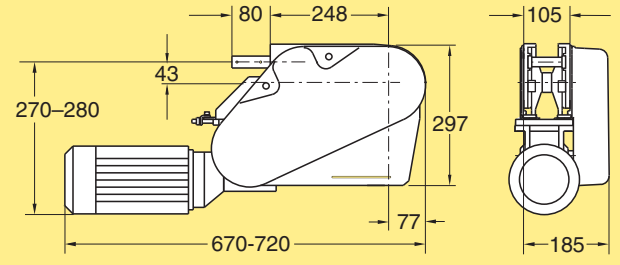


End drive unit
Speed up to 60 m/min
Transmission on right side
Fixed speed*
Without motor (ISO) **XHEB**
Without motor (ANSI) **XHEB 0 HR**
XHEB 0 HRA

Maximum traction force: 1250 N. See page 22.
*Use online configurator when ordering.
Effective track length: 0,80 m

End drive units XH, direct drive with slip clutch


End drive unit, direct drive with slip clutch

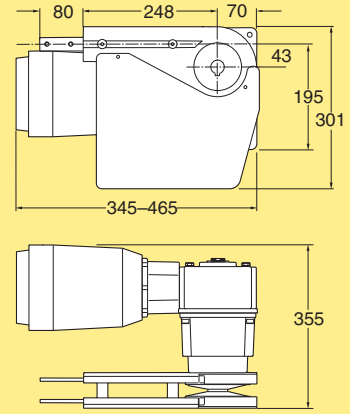

End drive unit, direct drive
Fixed speed up to 60 m/min
Variable speed: see Drive Unit Guide
Motor on left side
Fixed/variable speed* **XHEB**
Without motor **XHEB 0 HLP**

Maximum traction force: 1250 N. See page 22.
* Use online configurator when ordering.
Effective track length: 0,80 m

End drive unit, direct drive with slip clutch

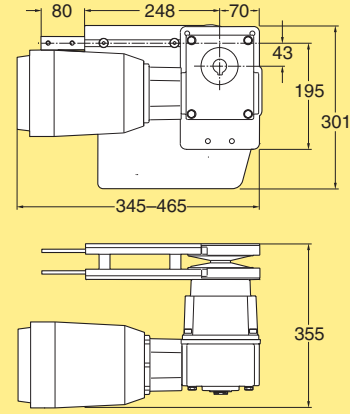


End drive unit, direct drive
Fixed speed up to 60 m/min
Variable speed: see Drive Unit Guide
Motor on right side
Fixed/variable speed* **XHEB**
Without motor **XHEB 0 HRP**

Maximum traction force: 1250 N. See page 22.
* Use online configurator when ordering.
Effective track length: 0,80 m

PO
CC
X45
XS
X65
X65P
X85
X85P
XH
XK
XKP
X180
X300
GR
CS
XT
HU
WL
WK
XC
XF
XD
ELV
CTL
FST
TR
APX
IDX

End drive units XH Type H, direct drive, no slip clutch

End drive unit, direct drive, no slip clutch

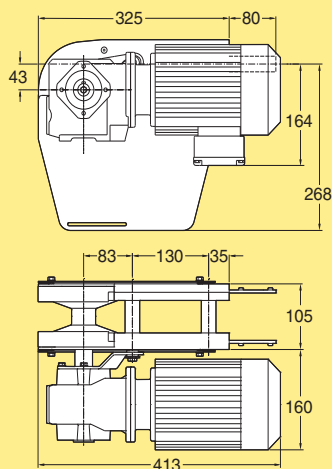

End drive unit, max 1250 N

Fixed speed up to 60 m/min

Variable speed: see Drive Unit Guide

Motor on left side

Fixed/variable speed*

Without motor


XHEB
XHEB 0 HNLP

Maximum traction force: see diagram, page 22.

*Use online configurator when ordering.

Effective track length: 0,80 m

End drive unit, direct drive, no slip clutch

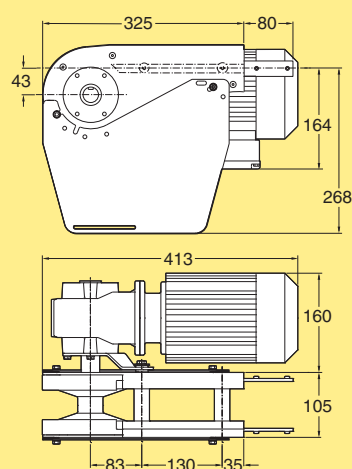

End drive unit, max 1250 N

Fixed speed up to 60 m/min

Variable speed: see Drive Unit Guide

Motor on left side

Fixed/variable speed*

Without motor

XHEB
XHEB 0 HNRP


Maximum traction force: see diagram, page 22.

*Use online configurator when ordering.

Effective track length: 0,80 m

Double drive units XH

Double drive unit, suspended

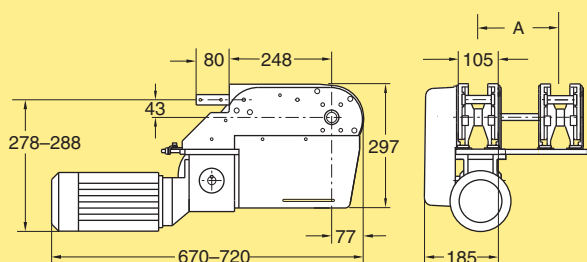

Double drive unit

Suspended motor

Fixed speed up to 60 m/min

Transmission on left side

A = 106 mm

Fixed speed*

Without motor (ISO)

Without motor (ANSI)

XHEB DD
XHEB 0 HLD106
XHEB 0 HLAD106

A = 150-350 mm

Without motor (ISO)

Without motor (ANSI)


XHEB 0 HLD-
XHEB 0 HLAD-

Maximum traction force: 1250 N. See page 22.

* Use online configurator when ordering.

Effective track length: 0,80 m

Double drive unit, suspended

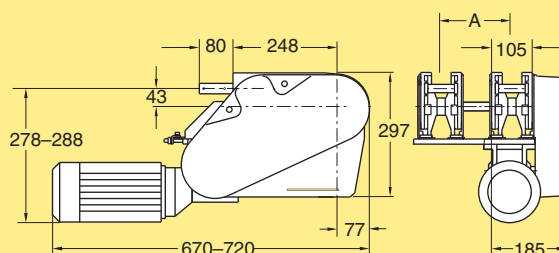

Double drive unit

Suspended motor

Fixed speed up to 60 m/min

Transmission on right side

A = 106 mm

Fixed speed*

Without motor (ISO)

Without motor (ANSI)

XHEB DD
XHEB 0 HRD106
XHEB 0 HRAD106

A = 150-350 mm

Without motor (ISO)

Without motor (ANSI)


XHEB 0 HRD-
XHEB 0 HRAD-

Maximum traction force: 1250 N. See page 22.

* Use online configurator when ordering.

Effective track length: 0,80 m

Intermediate drive unit

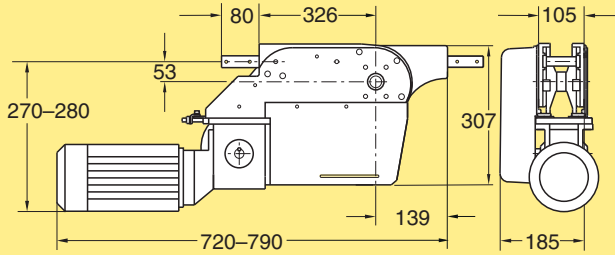


Intermediate drive unit
Suspended motor
Fixed speed up to 25 m/min
Transmission on left side
Fixed speed*
Without motor (ISO)
Without motor (ANSI)

XHER
XHER 0 HL
XHER 0 HLA

Maximum traction force: 200 N. See page 22.
* Use online configurator when ordering.
Effective track length: 1,00 m

Intermediate drive unit

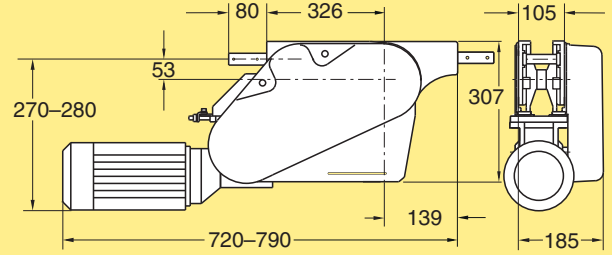


Intermediate drive unit
Suspended motor
Fixed speed up to 25 m/min
Transmission on right side
Fixed speed*
Without motor (ISO)
Without motor (ANSI)

XHER
XHER 0 HR
XHER 0 HRA

Maximum traction force: 200 N. See page 22.
*Use online configurator when ordering.
Effective track length: 1,00 m

Catenary drive units XH

Catenary drive unit

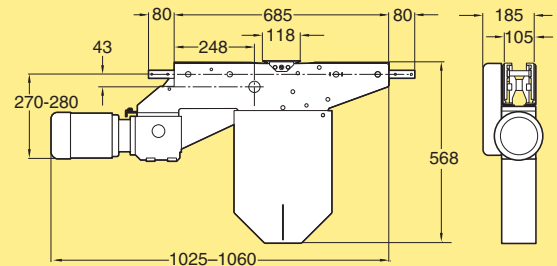


Catenary drive unit
Suspended motor
Fixed speed up to 25 m/min
Transmission on left side
Fixed speed*
Without motor (ISO)
Without motor (ANSI)

XHEC
XHEC 0 HL
XHEC 0 HLA

Maximum traction force: 1250 N. See page 22.
*Use online configurator when ordering.
Effective track length: 1,35 m

Catenary drive unit

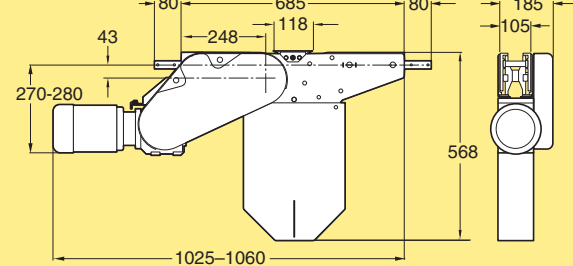

Catenary drive unit
Suspended motor
Fixed speed up to 25 m/min
Transmission on right side
Fixed speed*
Without motor (ISO)
Without motor (ANSI)


XHEC
XHEC 0 HR
XHEC 0 HRA

Maximum traction force: 1250 N. See page 22.
*Use online configurator when ordering.
Effective track length: 1,35 m

PO
CC
X45
XS
X65
X65P
X85
X85P
XH
XK
XKP
X180
X300
GR
CS
XT
HU
WL
WK
XC
XF
XD
ELV
CTL
FST
TR
APX
IDX

Bend drive unit XH

Bend drive unit, 180°

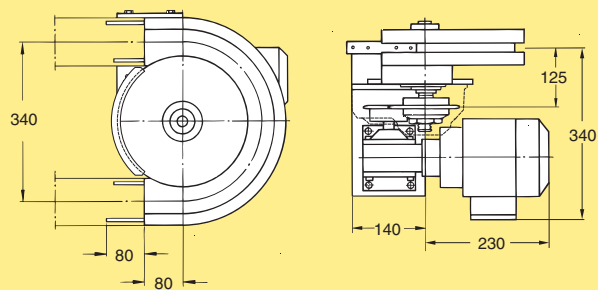

Bend drive unit, 180°

Fixed speed up to 30 m/min

Fixed speed*

Without motor (ISO)

Without motor (ANSI)

XHEW

XHEW 180/0 H

XHEW 180/0 HA


Maximum traction force: 200 N. See page 22.

*Use online configurator when ordering.

Effective track length: 0,65 m

Idler units XH

Idler end unit

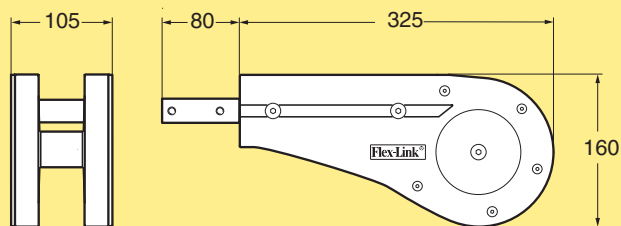


Idler end unit

XHEJ 325

Effective track length: 0,80 m

Idler bend unit, 90°

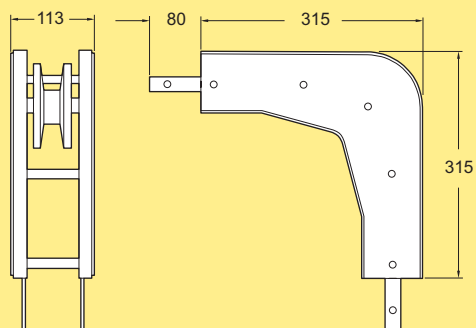


Idler bend unit, 90°

XHEK 90R50

Effective track length: 0,65 m.

Note. Cannot be used with return chain.


Protective cover for idler end unit



Protective cover for idler end unit

XHSJ 195

Passive bridge from conveyor to conveyor


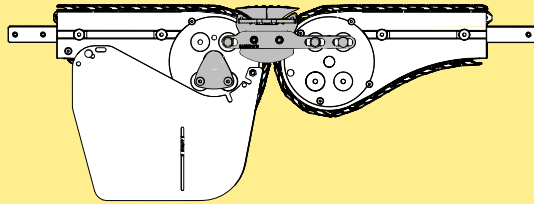


Passive bridge* **XHNG**

From: Heavy Drive To: Heavy Idler

* Use online configurator when ordering.

Passive bridge to or from machine or application, Single or double rollers

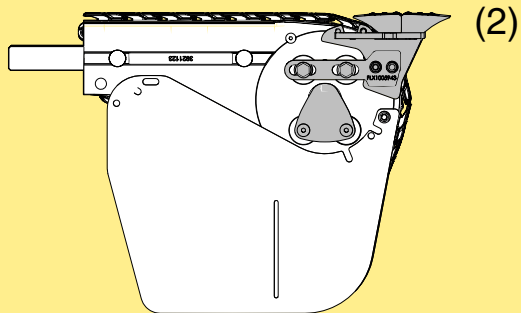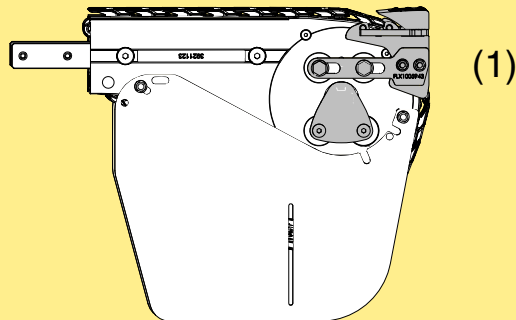

Passive bridge*
Single roller (1) or Double roller (2) **XHNG**

From: Heavy Drive To: External
External Heavy Idler

* Use online configurator when ordering.


Attachment wire



Wire for attaching roller to holder **FLX1006041**

*Also available as a configuration option through XHNG.

Sensor Kit

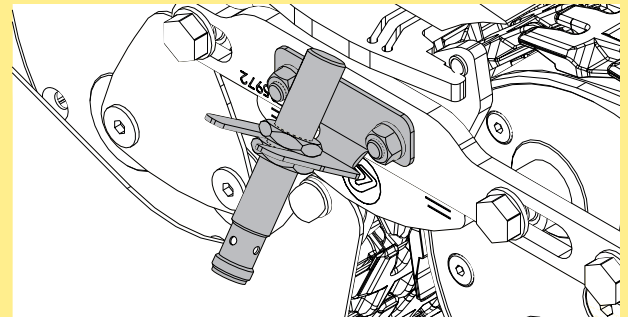


Bridge in position sensor kit
Conveyor to conveyor **FLX1006042**
External to/from Conveyor **FLX1006044**

*Also available as a configuration option through XHNG.

*Note
Bridges can not be used with cleated chain.

S-Transfer

S-Transfer

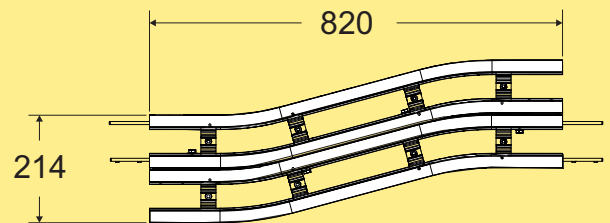


S-transfer for return chain
for XH

XHCY D

Effective track length: 3,3 m


Wheel bends XH

Wheel bend, 30°

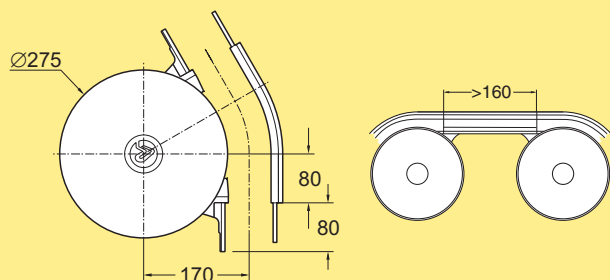


Wheel bend, 30° **XHBH 30R170 A**
Effective track length: 0,25 m 1-way (0,50 m 2-way)

Wheel bend, 45°

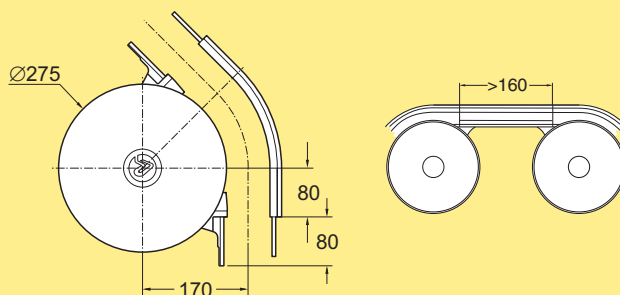


Wheel bend, 45° **XHBH 45R170 A**
Effective track length: 0,30 m 1-way (0,60 m 2-way)

Wheel bend, 90°

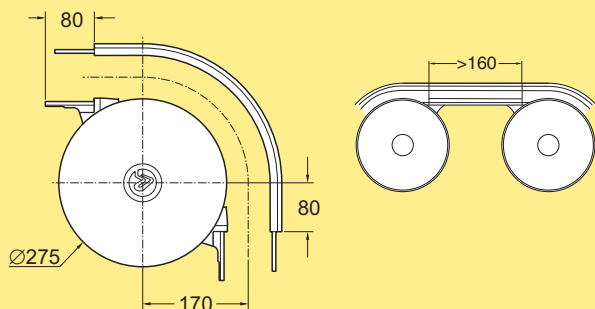


Wheel bend, 90° **XHBH 90R170 A**
Effective track length: 0,40 m 1-way (0,80 m 2-way)

Wheel bend, 180°

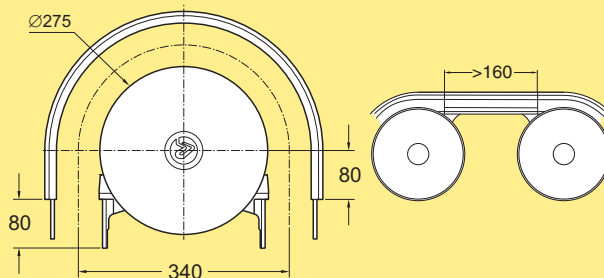


Wheel bend, 180° **XHBH 180R170 A**
Effective track length: 0,65 m 1-way (1,30 m 2-way)

Wheel bend, 210°




Wheel bend, 210° **XHBH 210R170 A**
Effective track length: 0,80 m 1-way (1,60 m 2-way)

Wheel bend, 30°–180°

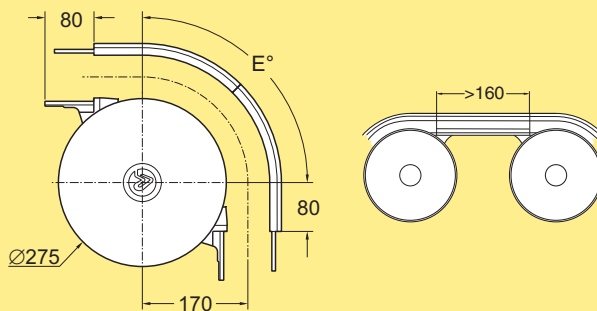


Wheel bend, 30°–180° **XHBH ER170 A**
The outer bend is cut in the middle to the desired angle and assembled using connecting strips. The angle "E" must be specified when ordering.

Wheel cover for X65/XL, XT, X85, XH



5112246


Wheel cover for X65/XL, XT, X85, XH **5112246**
(Including one pair of Wheel cover 5112244 and 2 tap screw ISO 7049 4,2x6,5-C-H-A2K)

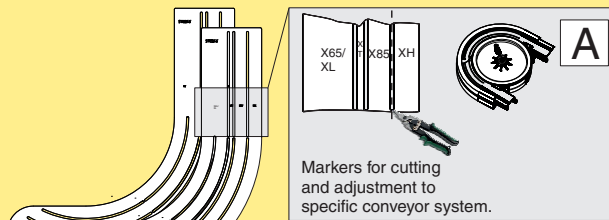

Example: To fit the wheel cover to a X85 system, cut the part marked XH (see figure A).
To fit the wheel cover to a XT system, cut the parts marked X85 and XH.

Plain bends XH

Plain bend, 30°

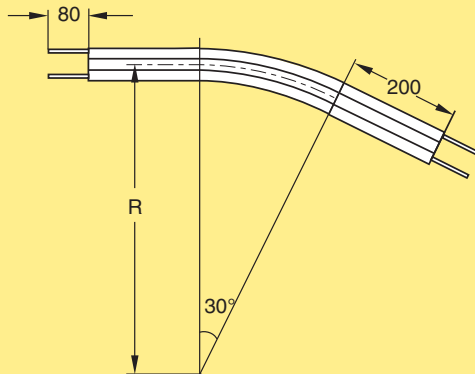

Plain bend, 30°±1°

R=500±10 mm

R=700±10 mm

R=1000±10 mm

XHBP 30R500

XHBP 30R700

XHBP 30R1000


Effective track lengths:

R500: 0,70 m 1-way (1,35 m 2-way)

R700: 0,80 m 1-way (1,55 m 2-way)

R1000: 0,95 m 1-way (1,85 m 2-way)

Plain bend, 60°

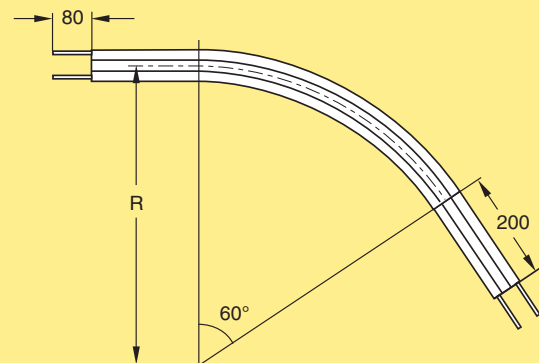

Plain bend, 60°±1°

R=500±10 mm

R=700±10 mm

R=1000±10 mm

XHBP 60R500

XHBP 60R700

XHBP 60R1000


Effective track lengths:

R500: 0,95 m 1-way (1,85 m 2-way)

R700: 1,15 m 1-way (2,30 m 2-way)

R1000: 1,45 m 1-way (2,90 m 2-way)

Plain bend, 45°

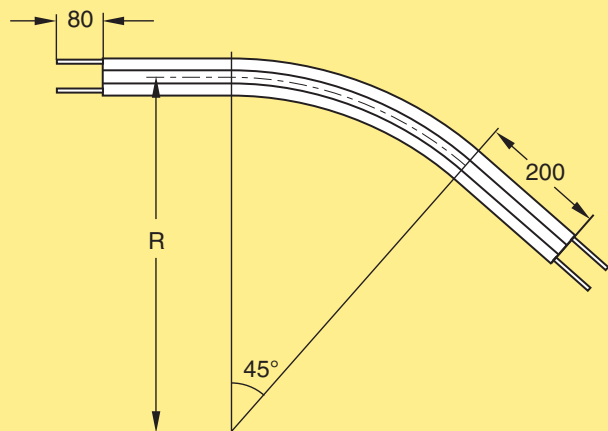

Plain bend, 45°±1°

R=500±10 mm

R=700±10 mm

R=1000±10 mm

XHBP 45R500

XHBP 45R700

XHBP 45R1000


Effective track lengths:

R500: 0,80 m 1-way (1,60 m 2-way)

R700: 0,95 m 1-way (1,90 m 2-way)

R1000: 1,20 m 1-way (2,40 m 2-way)

Plain bend, 90°

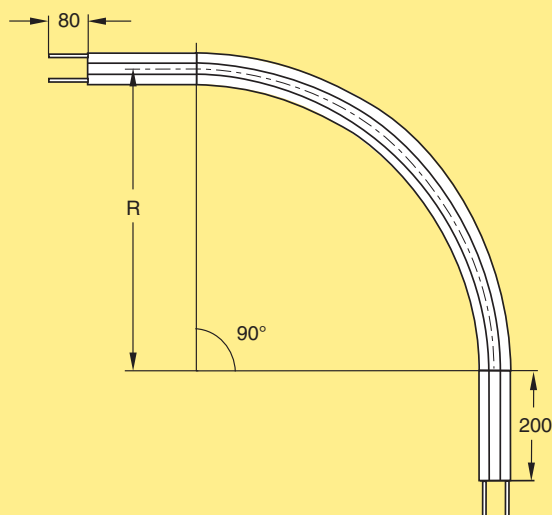

Plain bend, 90°±1°

R=500±10 mm

R=700±10 mm

R=1000±10 mm

XHBP 90R500

XHBP 90R700

XHBP 90R1000

Effective track lengths:


R500: 1,20 m 1-way (2,40 m 2-way)

R700: 1,50 m 1-way (3,00 m 2-way)

R1000: 2,00 m 1-way (3,95 m 2-way)

Support rail for plain bends XH

Support rail for plain bends

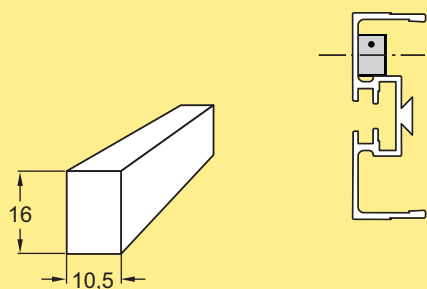


Support rail for plain bends, XH

Length 2,4 m

5048598


*Fix with sheet metal screw ISO 7049 4,2×9,5 or similar.
See page 521 for installation instructions.*

Vertical bend, 5°




Vertical bend, 5° **XHBV 5R400**
Effective track length: 0,20 m 1-way (0,40 m 2-way)

Vertical bend, 7°




Vertical bend, 7° **XHBV 7R400**
Effective track length: 0,20 m 1-way (0,45 m 2-way)

Vertical bend, 15°




Vertical bend, 15° **XHBV 15R400**
Effective track length: 0,30 m 1-way (0,55 m 2-way)

Vertical bend, 30°

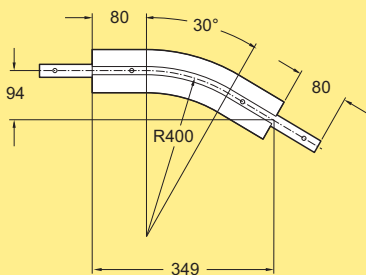


Vertical bend, 30° **XHBV 30R400**
Effective track length: 0,40 m 1-way (0,75 m 2-way)

Vertical bend, 45°

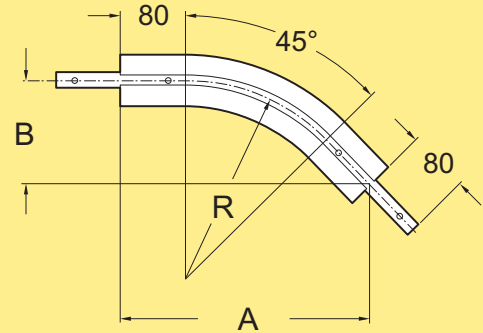


Vertical bend, 45°
R= 400, A=419, B=174 **XHBV 45R400**
R=1000, A=844, B=349 **XHBV 45R1000**
Effective track length:
R400: 0,50 m 1-way (0,95 m 2-way)
R1000: 0,95 m 1-way (1,90 m 2-way)

Vertical bend, 60°

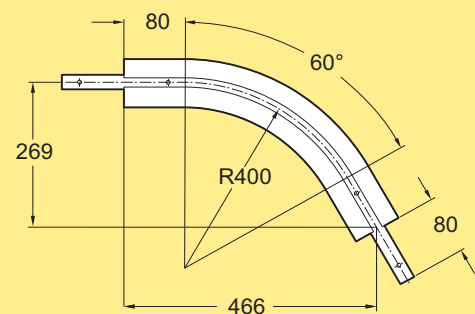


Vertical bend, 60° **XHBV 60R400**
Effective track length: 0,65 m 1-way (1,20 m 2-way)

Vertical bend, 90°

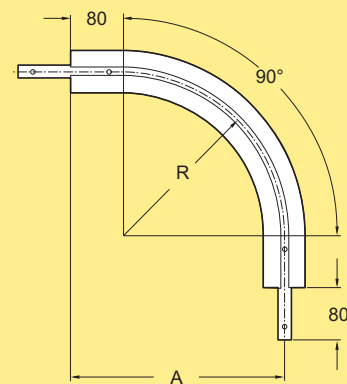

Vertical bend, 90°
R= 400, A= 480 **XHBV 90R400**
R=1000, A=1080 **XHBV 90R1000**
Effective track length:
R400: 0,85 m 1-way (1,60 m 2-way)
R1000: 1,75 m 1-way (3,50 m 2-way)

Vertical bend, 5°–90°

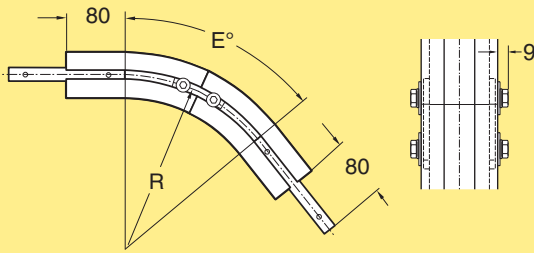

Vertical bend, 5°–90°

R=400


R=1000

XHBV ER400
XHBV ER1000

The bend is cut in the middle to the desired angle and assembled using connecting strips. The angle "E" must be specified when ordering.

Angle plates XH


Angle plate, straight

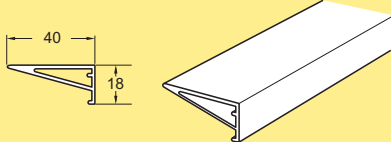

Angle plate
Length 3 m

XHRP 3


Angle plate for 90° bend

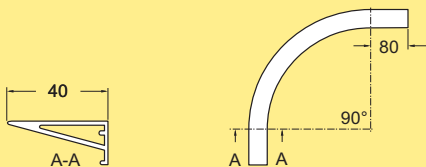

Angle plate for 90° bend
Used with XHBH 90R170
Inner radius 222,5 mm

XHRM 90


Angle plate for 180° bend

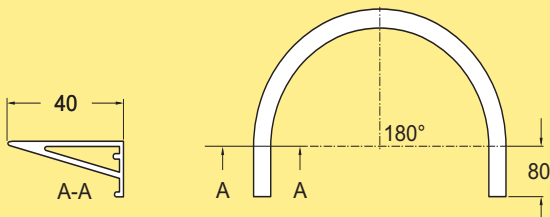

Angle plate for 180° bend
Used with XHBH 180R170 and
XHEW 180/5 H
Inner radius 222,5 mm

XHRM 180


Front piece

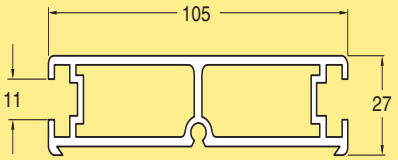

Front piece
Length 3 m

XHVF 3


Sliding strip for front piece

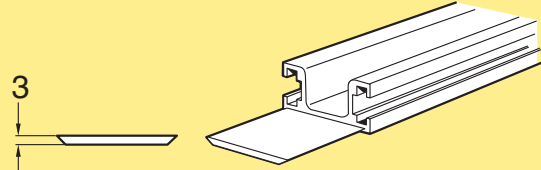

Sliding strip for front piece
Length 2 m

XHVG 2

Front piece upper bend




Upper bend, 60°

XHVA 60R460

Includes connecting strip with screws

Front piece lower bend




Lower bend, 60°

XHVB 60R335

Includes connecting strip with screws

Linkage kit for front piece

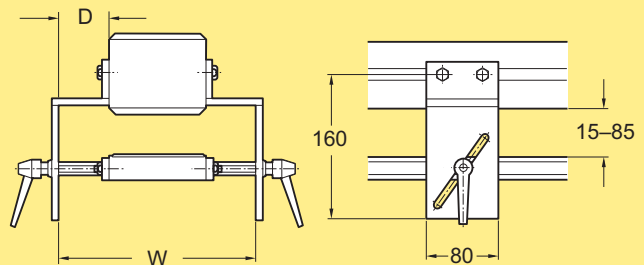


Linkage kit
W=190, D=43
W=290, D=93

XHVK 43
XHVK 93

Kit consists of two support pairs.

Bend support for front piece

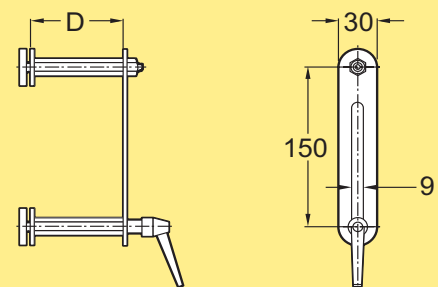


Bend support
D=43 mm
D=93 mm

XHVS 43
XHVS 93

PO
CC
X45
XS
X65
X65P
X85
X85P
XH
XK
XKP
X180
X300
GR
CS
XT
HU
WL
WK
XC
XF
XD
ELV
CTL
FST
TR
APX
IDX

Drip trays XH


Drip tray

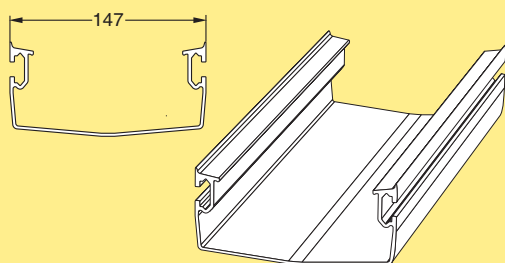

Drip tray
Length 3 m

XHDT 3×147 B


Drip tray bracket



Drip tray bracket

XLDB 21×100

Connecting strip

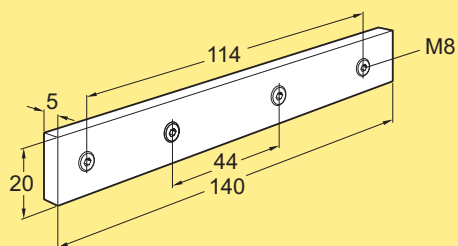


Connecting strip with set screws **XLCJ 5×140**

Note. Contains 10 pcs.

Drip catchers XH


Drip catcher 53 mm



Drip catcher 53 mm
Length 3 m

XHDS 3×53


Drip catcher 83 mm



Drip catcher 83 mm
Length 3 m

XHDS 3×83

Drip catcher bracket assembly

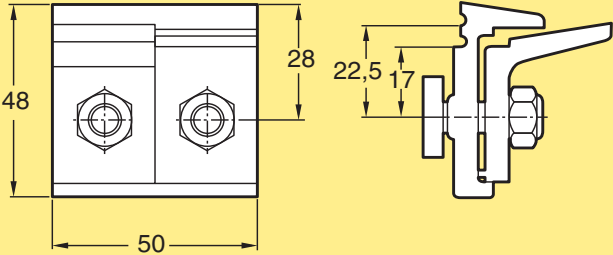

Drip catcher bracket assembly
Including T-bolts and nuts

XHDR 23

- PO
- CC
- X45
- XS
- X65
- X65P
- X85
- X85P
- XH**
- XK
- XKP
- X180
- X300
- GR
- CS
- XT
- HU
- WL
- WK
- XC
- XF
- XD
- ELV
- CTL
- FST
- TR
- APX
- IDX

